

# WHAT CAN MINERS EXPECT FROM THEIR CAT MINING TRUCKS? THE LOWEST POSSIBLE COST PER TON OVER THE LIFE OF THE MACHINE.

A lot goes into delivering that value. Like high speed on grade for improved productivity. A class-leading standard payload. Anytime braking plus front and rear wheel retarding for more confident operators. Total Cat integration, which results in highly efficient systems and performance. And high reliability, so trucks spend more time hauling material than they do sitting in the maintenance shop.

# **CAT**® 797F

HIGH PRODUCTIVITY. SUPERIOR BRAKING. LONG LIFE.



#### WHAT WILL IT TAKE TO BOOST YOUR BOTTOM LINE?

Greater productivity thanks to a best-in-class payload? Superior braking that leads to confident, productive operators? Or a tough, rugged frame that delivers performance and long life no matter the conditions?

With the Cat® 797F, you get all of this — and more. Today's 797F is the most productive 364-tonne (401-ton) truck in the market. It's fast, fuel efficient and delivers class-leading productivity, making it the industry benchmark for lower cost per ton in its size class. It hauls more every load, every cycle and every shift. And it delivers a better bottom line to the most important mine in the world: yours.

#### **OVERALL LOWER COSTS**

26%
LOWER
MAINTENANCE
COSTS

UP TO
10%
LOWER
FUEL COSTS

36% LOWER OILS & LUBE COSTS 20%
LOWER
OPERATING
COSTS

#### **GREATER THAN 90% AVAILABILITY**

- + Lower maintenance ratios
- + Longer component lives
- + High reliability

#### **MOST DURABLE 797F EVER**

- + Over 130,000 hours in Canadian Oil Sands
- + Major drive train component life improvement
- + Over 80% of frame is cast, not fabricated
- + 5% tire life improvement
- + Significant engine life increase





With offerings in both electric and mechanical drive and payloads ranging from 138 to 372 tonnes (152 to 410 tons), Caterpillar can offer a truck for every type of mining application. But one thing all the models have in common is the philosophy we follow in their design. Whatever measurement you use for material movement, our goal is to help you optimize that cycle — lowering cost per ton and delivering a better bottom line to your operation.





#### A PROVEN DESIGN PHILOSOPHY

When it comes to making Cat large mining trucks, we follow a proven design philosophy that focuses around five main areas:

- 1. MAKING A SUSTAINED INVESTMENT IN RESEARCH & DEVELOPMENT
- 2. INTEGRATING EVERY COMPONENT
- 3. DELIVERING IRON THAT PERFORMS
- 4. SUPPORTING PRODUCTS—
  AND PRODUCTIVITY
- 5. LISTENING TO OUR
  CUSTOMERS TO SPUR
  CONTINUOUS IMPROVEMENT

By following this philosophy — for every truck, every time — we ensure that you get what you expect from Caterpillar: the lowest cost per ton of any mining truck in the industry.

A PROVEN APPROACH TO R&D



A WORLD-CLASS TEAM OF ENGINEERS AND EXPERTS



A DISCIPLINED APPROACH TO DEVELOPMENT



MINING INDUSTRY FEEDBACK




TESTING AND VALIDATION OF EVERY MACHINE


# BUMPER-TO-BUMPER CATERPILLAR

The individual components, software, systems and engine that go inside a Cat 797F truck have different purposes, but they have one very important thing in

common: They are all manufactured by Caterpillar and supported by the Cat dealer network. This integration ensures that the entire truck, from tires to transmissions, engines to electronics, can be fully optimized to deliver the lowest cost per ton.



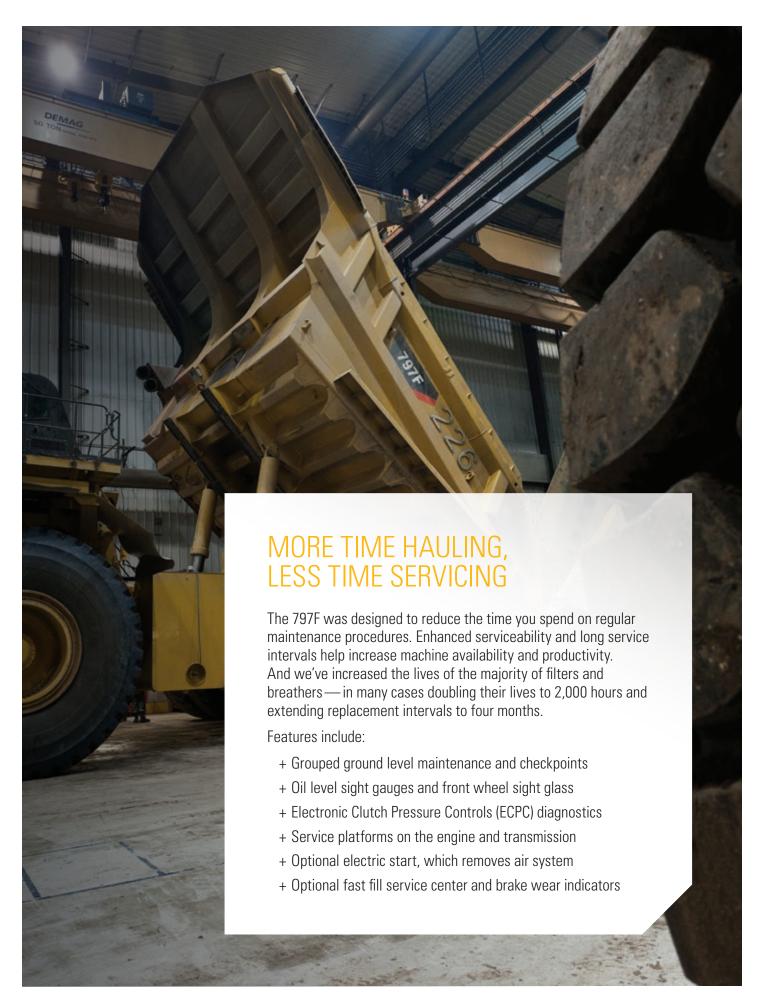

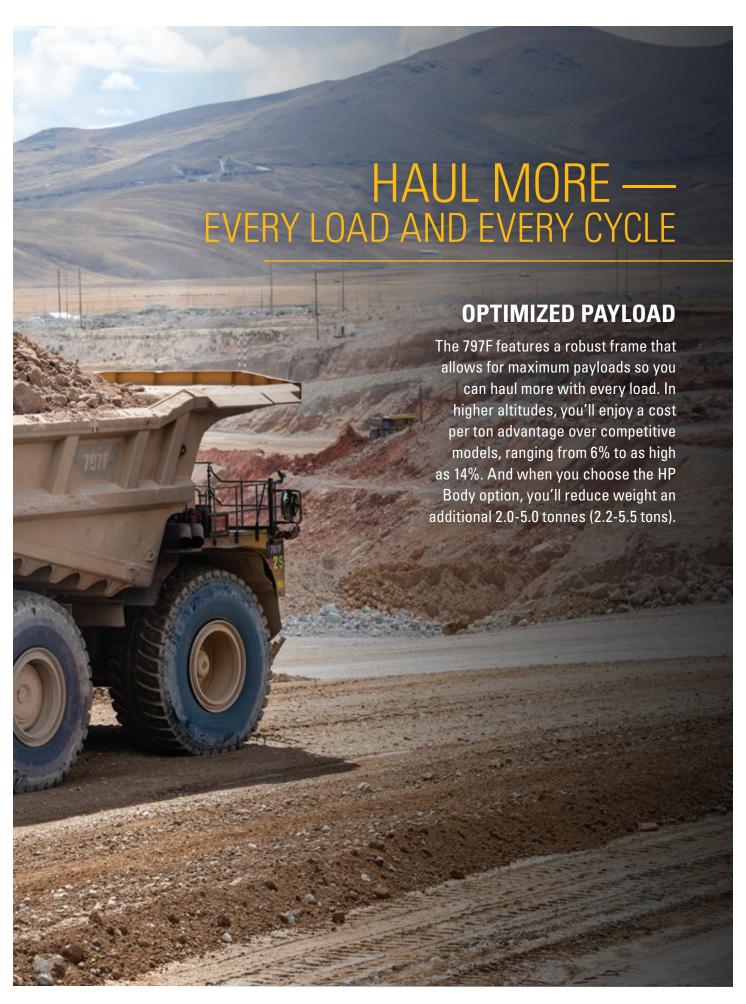

#### **FASTER SPEEDS**

The 797F delivers optimal speed on steep grades, poor underfoot conditions and haul roads with high rolling resistance for faster cycle times when compared to competitive trucks. Its C175-20 diesel engine's 20-cylinder, four-stroke design uses long, effective power strokes for optimum efficiency. The 23% net torque rise provides unequaled lugging force during acceleration. The 797F travels loaded at a top speed of 60 km/h (42 mph).

#### **CONSTANT POWER**

Superior mechanical power density delivers high efficiency at the lowest system weight and cost. The Cat seven-speed planetary power shift transmission varies gear ratios to optimize powertrain efficiency to the application, delivering constant power over a wide range of operating speeds. The lock-up torque converter delivers low-speed movement control and unsurpassed stall torque while still allowing for efficient direct drive haulage. Cat final drives work as a system with the planetary power shift transmission to deliver maximum power to the ground.

### WHAT IF YOU COULD TRAVEL FASTER—EVEN IN TOUGH CONDITIONS?



MILES / KILOMETERS


WHEN FUEL EFFICIENCY GOES UP, COSTS GO DOWN

Aside from paying operators, fuel is often the biggest operating expense for a mining truck. That's why we've worked to make the 797F one of the most fuel-efficient trucks in the industry. We've completed multiple projects in search of new ways to reduce fuel consumption in a variety of applications such as flat hauls, high-altitude deep pits and oil sands. And we've seen improvements from 3% to 10%.

Multiple power settings allow you to operate at full power or in economy mode, so you can decide how much power you need. By flipping a switch, these modes fine-tune hydraulic and engine output to match the job at hand. Eco-mode has been shown to deliver fuel savings of up to 3.5% per cycle.

- + Optimized fuel calibrations are available for Tier 4, high altitude and lesser regulated applications
- During retarding applications, the engine ECM does not inject fuel into the cylinders, resulting in exceptional fuel economy. The result is zero fuel burn during retarding
- + Fuel efficiency is further increased with the Tier 4 configuration



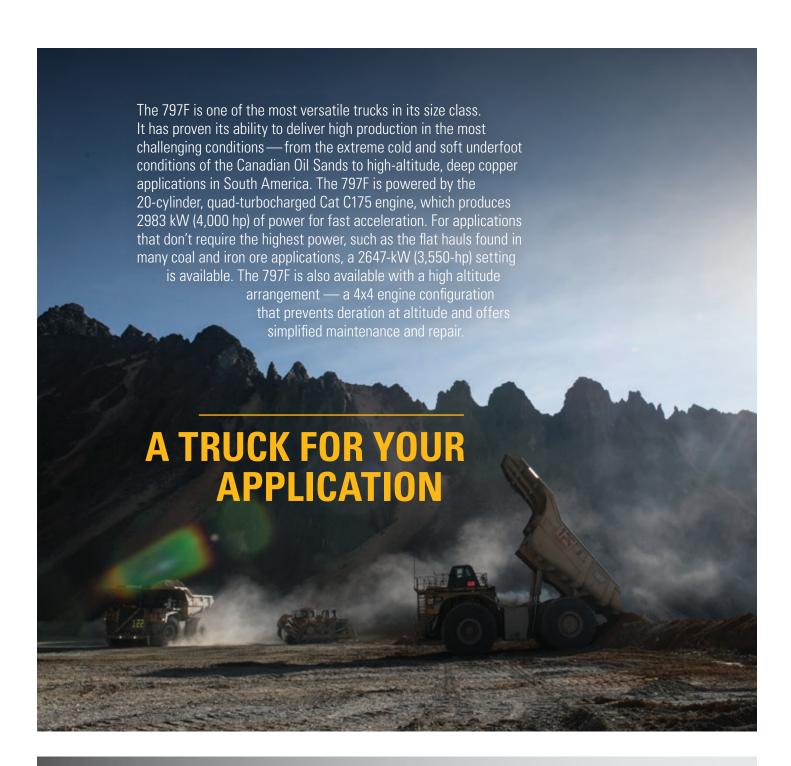



#### A TRUCK YOU CAN DEPEND ON

More than 20 years after the first Cat 797 went to work in the Canadian Oil Sands, that same truck is still at work. While today's 797s boast new features and enhancements that make them more productive and reliable than their predecessors, they have one very important attribute in common with that first truck: their longevity.

In the last two decades, Caterpillar has produced over 1,000 797s — and the majority are still on the job. The first 797 has logged more than 130,000 hours and there are countless others well on their way to achieving even higher hours. The 797 is the only mining truck in its size class to reach this high-hour milestone.






The 797F is our most durable 797 ever.

The frame uses a box-section design, incorporating two forgings and 14 castings in high stress areas with deep penetrating and continuous wrap-around welds to resist damage from twisting loads without adding extra weight. Over 80% of the frame is cast, not fabricated steel plate. The integral 4-Post ROPS cab provides increased strength for operator protection.

Cat trucks are designed to last over 100,000 hours, and many are going well beyond that. The frame, powertrain, engine and components are built to be rebuilt—using new, remanufactured or rebuilt parts and components—so you can take advantage of multiple lives of like-new performance at a fraction-of-new price.

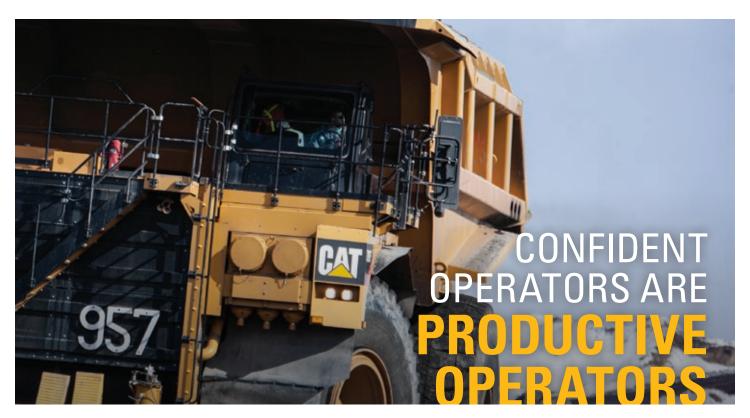

#### **DESIGNED FOR CONTROL**

Proven Cat braking systems deliver superior control so your operators can focus on productivity. Like all Cat mechanical-drive trucks, the 797F features four-corner oil-cooled brakes and Automatic Retarder Control to improve handling and machine control so operators can work quickly and confidently.

The brakes are continuously cooled by water-to-oil heat exchangers for exceptional, non-fading braking and retarding performance. With retarding power applied to all four corners, the full weight of the truck can be applied for traction, resulting in the ability to hold a higher retarding force in poor underfoot conditions.






#### **DESIGNED FOR COMFORT**

With two cab options, you can equip your 797F with the features you desire. All options offer an ergonomic layout, and controls, levers and switches that are positioned for ease of use. The cab includes dozens of features designed to enhance comfort and reduce fatigue, such as reduced vibration and sound, and a next generation seat that includes a height adjuster; adjustable shoulder stock to keep the seatbelt from rubbing; and seat back, side and lumbar bolsters to increase stability. The cab provides excellent all-around visibility, which is further enhanced with the optional Work Area Vision System and Cat MineStar™ Detect.

#### **SAFETY-INFUSED**

From slip-resistant surfaces and guard rails to state-of-the-art collision avoidance technologies, the Cat 797F is infused with features to help operators feel safe and confident on the job.



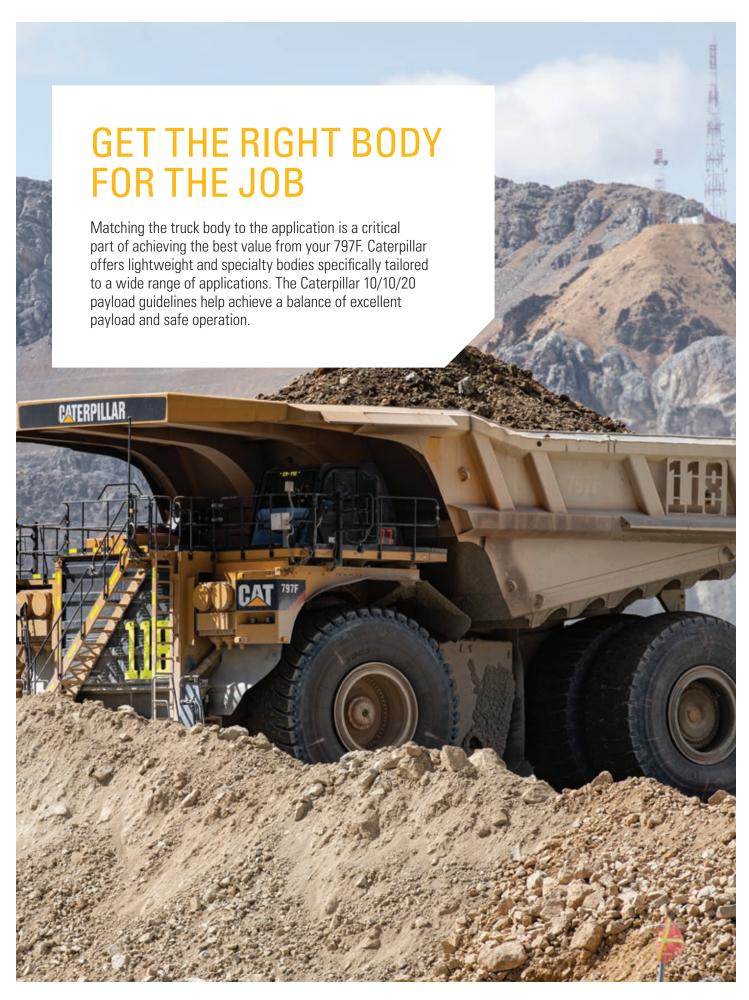

#### **HIGH PERFORMANCE BODY**

When you equip your 797F with a Cat High Performance (HP) body, you'll experience the benefits of a higher payload thanks to a weight reduction of 2.0-5.0 tonnes (2.2-5.5 tons) or more. The HP body features a lightweight, simplified and durable design that provides complete front machine coverage and extended overhead protection.

The HP body features robust top rail geometry with internal stiffeners and a high-visibility load placement indicator. Patented floating bolsters and spring plates improve overall durability by avoiding welds in high stress areas. In addition, the body requires only minimal liner coverage due to thicker and harder base plates. Curved front/side transitions minimize carryback.



#### THE BENEFITS

INCREASED PAYLOAD FROM 5.0-8.0 TONNES (5.5 -8.8 TONS)

REDUCED FUEL CONSUMPTION

OPTIMIZED PAYLOAD SPLITS

#### PROVEN DESIGN

+ Over 300 HP bodies in operations worldwide

#### EXTENDED TIRE LIFE AND FRONT WHEEL LIFE

- + Reduce tire wear by 5%
- + Reduce tire costs by 5%

LESS SPILLAGE

MINIMIZED CARRYBACK


#### SPECIALITY BODIES

#### OIL SANDS BODY

Specifically designed for use in challenging Canadian Oil Sands applications.

#### **HP-XL BODY**

A version of the standard HP body with an extended length floor, designed to neutralize extreme forward bias loading applications.

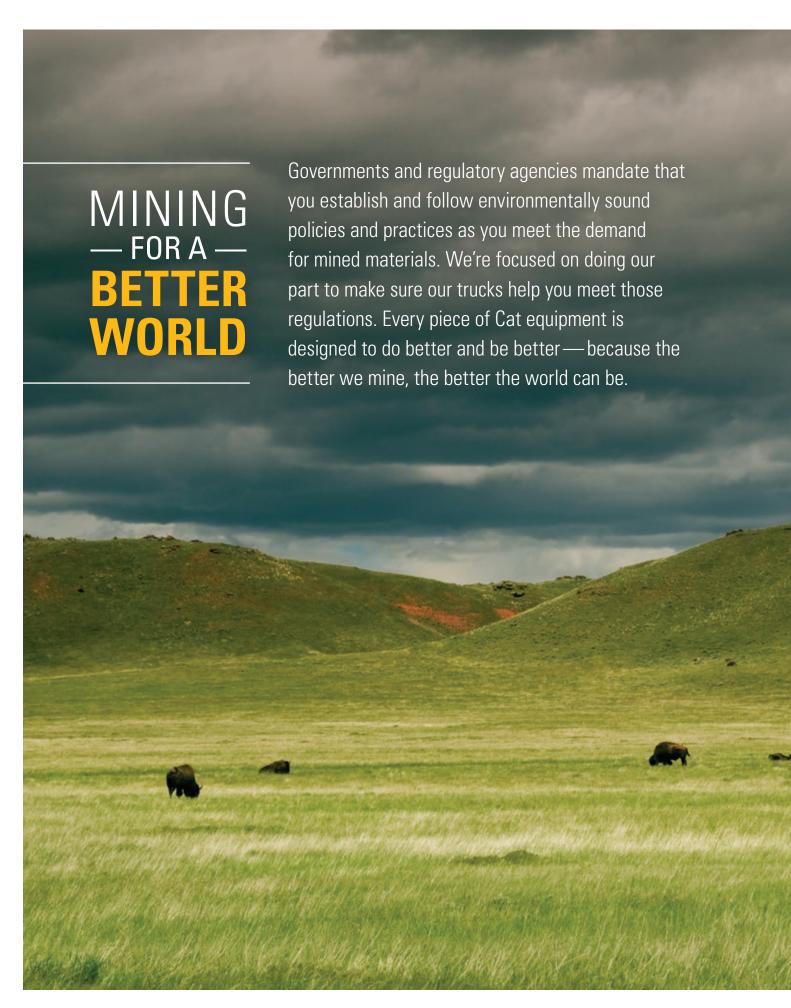





We've designed the 797F to use less fuel, which reduces engine emissions and carbon footprint, and there is zero fuel burn during retarding. The optional Tier 4 Final engine reduces NOx and particulate matter. Rear axle filtration, extended life filters and extended maintenance intervals decrease the amount of waste contributed to the environment.


We also continue to research alternative energy sources such as biofuels and liquefied natural gas and power options like electrification and trolley to find new ways to reduce emissions. In addition, we preserve raw materials, conserve energy and reduce emissions through the Cat Reman program, which returns end-of-life components to like-new condition.



#### MORE POWER, LOWER COSTS

The 797F is powered by the C175-20 engine, which contributes to overall lower operating costs thanks to:

- + Over 18 years of experience in mining applications backed by robust virtual, lab and field validation.
- + High displacement, low rpm rating and conservative horsepower ratings, which mean more time on the haul roads and less time in the shop.
- + The Cat Common Rail Fuel System, an electronically controlled system that senses operating conditions and regulates fuel delivery for optimum fuel efficiency.

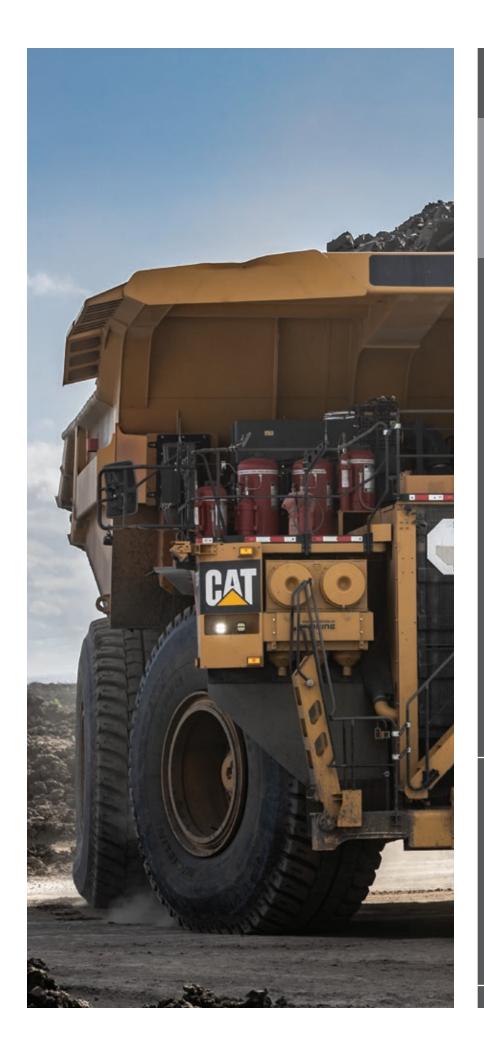


## THE INDUSTRY'S BEST EMISSIONS SYSTEM


The Cat 797F is available in a fuel-efficient configuration that meets U.S. EPA Tier 4 Final emissions standards. Through over 150,000 hours of successful operation on Cat large mining trucks, the system has proven its ability to deliver with no impact on machine performance. Designed for easy serviceability with readily accessible components, the modular aftertreatment system reduces overall fluid and fuel consumption and is aligned with truck preventive maintenance intervals to maintain high availability. Lower fuel burn results in longer engine life and lower repair costs.

OVER 150,000 HOURS

OF SUCCESSFUL OPERATION

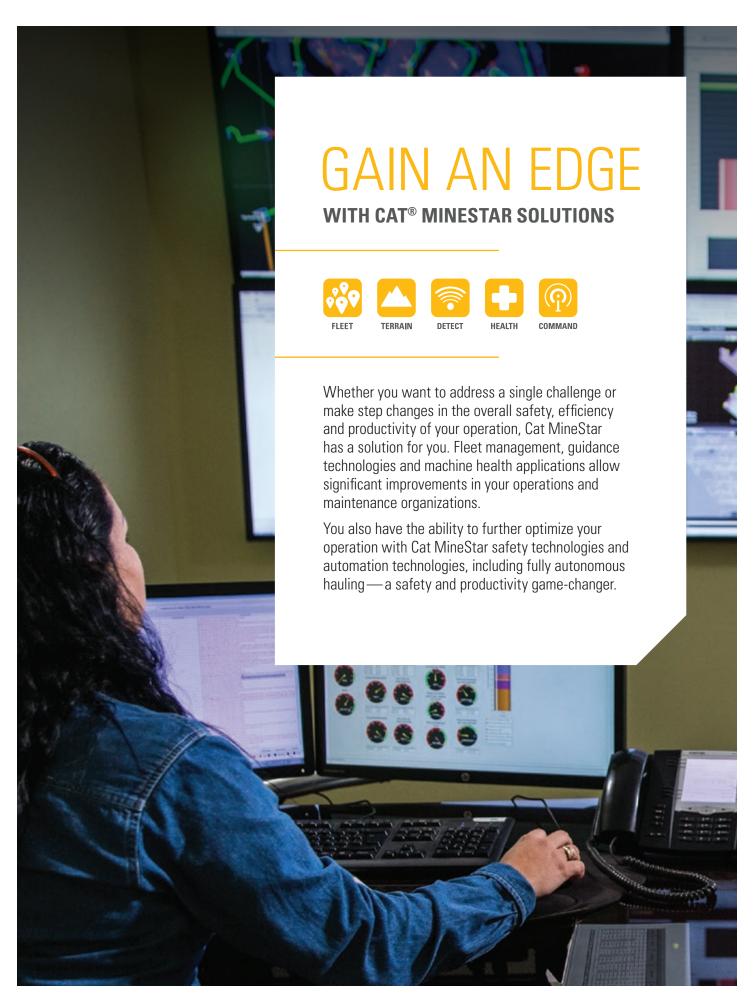



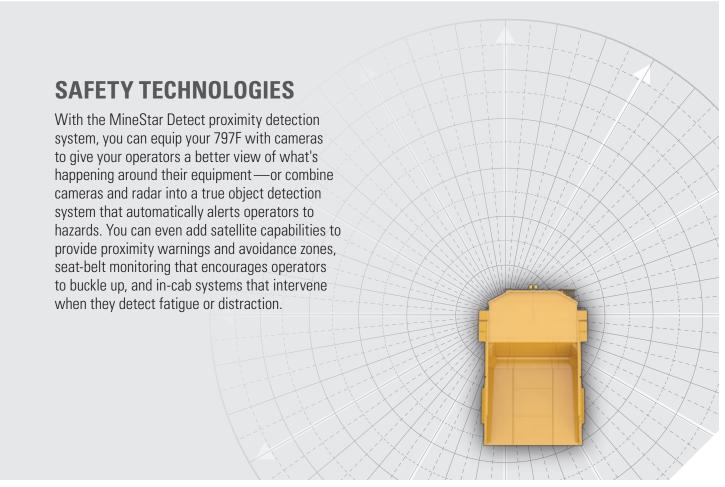



#### IN YOUR PERFORMANCE


Our commitment to your success doesn't end when your Cat 797F begins hauling overburden or ore. We immediately start looking for ways to make that truck work more efficiently, safely and productively. From addressing performance issues, to training operators and technicians, to calibrating onboard technologies — our support of your truck productivity is ongoing.



Caterpillar and Cat dealer personnel will partner with you on site to improve the performance not only of your trucks but of your overall loading and hauling operation. You'll have access to parts and service, and technicians who are focused on helping you optimize repairs to keep machines in the field rather than the maintenance shop. And we help with training to ensure your operators have the skills and knowledge they need to work as efficiently and productively as possible.

We also work alongside you to ensure you achieve maximum value throughout the life of your equipment. Together with our Cat dealer network, we customize service offerings to provide a maintenance solution that fits your operation—whether you want to perform the majority of service yourself, or you're looking for an onsite partner to manage your maintenance organization. We're also consultants who can help you make smart decisions about buying, operating, maintaining, repairing, rebuilding and replacing equipment.



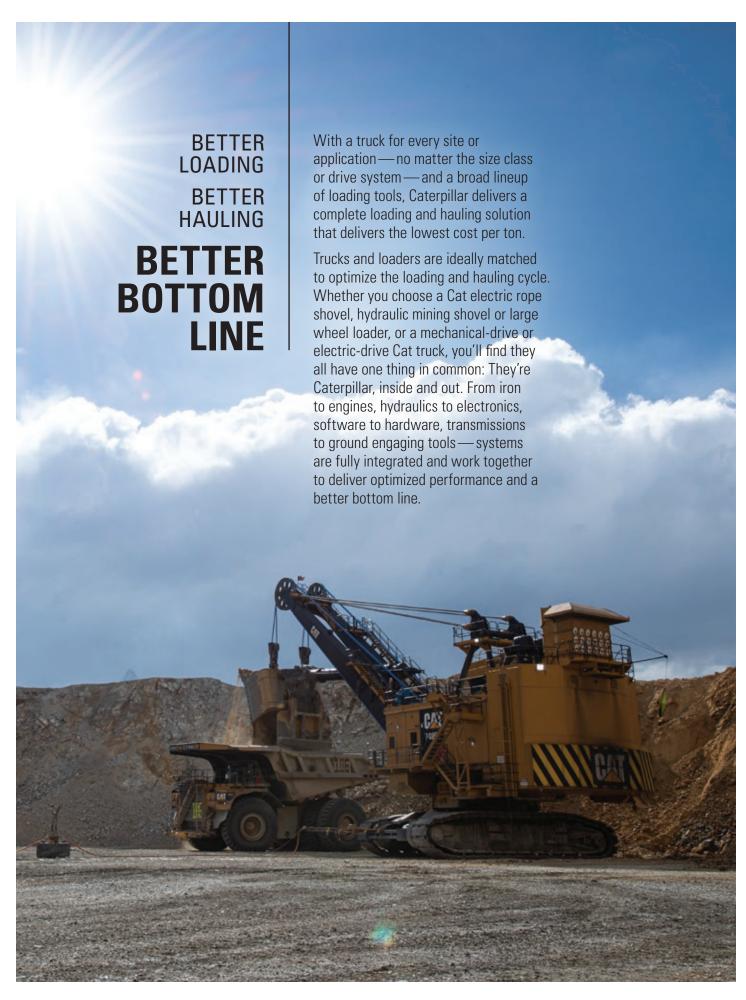





#### **TECHNICAL SPECIFICATIONS**

See cat.com for complete specifications.

| ENG                          | NE             |                       |
|------------------------------|----------------|-----------------------|
| Engine Model                 | Cat C175-20    |                       |
| Gross Power – SAE J1995:2014 | 2983 kW        | 4,000 hp              |
| Net Power – SAE J1349:2011   | 2828 kW        | 3,793 hp              |
| Rated Speed                  | 1,750 rpm      |                       |
| Emissions Rating             | Fuel Optimized |                       |
| Bore                         | 175 mm         | 6.9 in                |
| Stroke                       | 220 mm         | 8.7 in                |
| Displacement                 | 106 L          | 6,469 in <sup>3</sup> |
|                              |                |                       |

- Net Power advertised is the power available at the flywheel when the engine is equipped with air intake system, exhaust system, and alternator.
- + U.S. EPA Tier 4 Final available for applicable markets.
- + High Altitude Engine Configuration (4x4) option available.

| WEIGHTS – APPROXIN   | IATE       |              |
|--|------------|--------------|
| Rated Gross Machine Weight (RGMW)  | 623 690 kg | 1,375,000 lb |
| Body Weight (BW)   | 43 000 kg  | 94,799 lb    |
| Chassis Weight (CW)  | 215 217 kg | 474,472 lb   |
| Nominal Rated Payload (NRP)  | 364 tonnes | 401 tons     |
| Company to the company of the street of the company |            |              |

- + Consult your tire manufacturer for maximum tire load
- + Chassis weight with full fuel and fluids, standard & mandatory attachments, hoist, body mounting group, rims, and tires.

| WEIGHT DISTRIBUTIONS – APPRO                    | XIMATE |
|---|--------|
| Front Axle – Empty                              | 47.2%  |
| Rear Axle – Empty                               | 52.8%  |
| Front Axle – Loaded                             | 33.3%  |
| Rear Axle – Loaded                              | 66.7%  |
| + Weight distributions optimized with Cat body. |        |

| FINAL D   | RIVES   |
|---|---------|
| Differential Ratio                                      | 1.276:1 |
| Planetary Ratio   | 16.67:1 |
| Total Reduction Ratio                                   | 21.26:1 |
| + Double reduction, planetary with full floating axles. |         |

| TRANSMISSI         | ON        |          |
|--------------------|-----------|----------|
| Forward 1          | 10.7 km/h | 6.6 mph  |
| Forward 2          | 14.4 km/h | 8.9 mph  |
| Forward 3          | 19.3 km/h | 12.0 mph |
| Forward 4          | 26.1 km/h | 16.2 mph |
| Forward 5          | 35.0 km/h | 21.8 mph |
| Forward 6          | 47.3 km/h | 29.4 mph |
| Forward 7          | 63.6 km/h | 39.5 mph |
| Reverse            | 11.9 km/h | 7.4 mph  |
| Top Speed – Loaded | 63.6 km/h | 39.5 mph |

| SUSPENS                             | ION     |        |
|-------------------------------------|---------|--------|
| Effective Cylinder Stroke – Front   | 99.1 mm | 3.9 in |
| Effective Cylinder Stroke – Rear    | 93.2 mm | 3.7 in |
| Rear Axle Oscillation ±3.96 degrees |         |        |
| 0 16                                |         |        |

+ Self-contained nitrogen/oil cylinders, rear strut pin-to-pin mounting, top & bottom double shear clevis attachments

| BODY HOISTS  |            |             |
|--|------------|-------------|
| Pump Flow – High Idle                                      | 1140 L/min | 317 gal/min |
| Relief Valve Setting – Raise                               | 24 200 kPa | 3,510 psi   |
| Body Raise Time – High Idle                                | 25 sec     |             |
| Body Lower Time – Float                                    | 18 sec     |             |
| Body Power Down – High Idle                                | 18 sec     |             |
| + Twin, two-stage hydraulic cylinders with snubbing valve. |            |             |

| BRAKING SYS                       | STEM                    |                        |
|-----------------------------------|-------------------------|------------------------|
| Front Wet Disc Brake Surface Area | 132 259 cm <sup>2</sup> | 20,500 in <sup>2</sup> |
| Rear Wet Disc Brake Surface Area  | 198 388 cm <sup>2</sup> | 30,750 in <sup>2</sup> |
| Standards (Service and Secondary) | ISO 3450:2011           |                        |

- + Service Brakes: Four-Corner, Wet Disc, Oil Cooled, Hydraulically Actuated
- + Parking Brake: Four-corner, Multi-disc, Spring applied, Hydraulically Released
- + Anti-Lock Brake System (ABS) optional with CMD package

| CAPACITY – HP BODY – 100 | % FILL FACTOR |                    |
|--------------------------|---------------|--------------------|
| Struck                   | 172 m³        | 225 yd³            |
| Heaped (SAE 2:1)         | 252 m³        | $330 \text{ yd}^3$ |
| 0 1 10 1 1 6 1 1 1       | 1 1 2         |                    |

| + ( | Consult vour | local Cat de | aler for truck | k body recommer | ıdations. |
|-----|--------------|--------------|----------------|-----------------|-----------|
|-----|--------------|--------------|----------------|-----------------|-----------|

| SERVICE REFILL CAPACITI                              | ES     |           |
|--|--------|-----------|
| Fuel Tank  | 7570 L | 2,000 gal |
| Fuel Tank  | 5110 L | 1,350 gal |
| Fuel Tank  | 3785 L | 1,000 gal |
| Fuel Tank (Tier 4)                                   | 4542 L | 1,200 gal |
| Diesel Exhaust Fluid (DEF) Tank                      | 379 L  | 100 gal   |
| Cooling System                                       | 1160 L | 306 gal   |
| Crankcase  | 390 L  | 103 gal   |
| Front Wheels, Each                                   | 61 L   | 16 gal    |
| Final Drives, Differentials                          | 1250 L | 330 gal   |
| Steering Tank  | 370 L  | 95 gal    |
| Steering System (Includes Tank)                      | 355 L  | 94 gal    |
| Brake/Hoist Tank                                     | 770 L  | 203 gal   |
| Brake/Hoist System (Includes Tank)                   | 1850 L | 489 gal   |
| Torque Converter Sump                                | 303 L  | 80 gal    |
| Torque Converter/Transmission System (Includes Sump) | 629 L  | 166 gal   |

|       | TIRES & RIMS |  |
|-------|--------------|--|
| Tires | 59/80R63     |  |
| Rims  | 44" x 63"    |  |

- + Quick Change Rims optional.
- + Caterpillar recommends the customer evaluate all job conditions and consult tire manufacturer for proper tire selection and TKPH (TMPH) capabilities.

| САВ   |               |  |
|---|---------------|--|
| Air Conditioning (HFC - 134A refrigerant)                             | 24,300 Btu/hr |  |
| Heater / Defroster  | 38,900 Btu/hr |  |
| + Ambient capabilities down to -30°C (-22°F) for heater/defroster and |               |  |

- up to 50°C (122°F) for air conditioning.

  + The operator sound pressure level, 76 dB(A), complies with ISO 6394:2008 and ISO 6396:2008.
- + ROPS (Rollover Protective Structure) meets ISO 3471:2008 criteria.
- + FOPS (Falling Objects Protective Structure) meets ISO 3449:2005 Level II criteria.

| STEERING                         |               |          |
|----------------------------------|---------------|----------|
| Steer Angle                      | 40 degrees    |          |
| Turning Diameter (ISO 7457:2009) | 37.4 m        | 122.7 ft |
| Steering Standards               | ISO 5010:2007 |          |



# LARGE MINING TRUCK

For more complete information on Cat products, dealer services and industry solutions, visit us at www.cat.com

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

© 2021 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

PEDJ0473-02

